


# Detector Switch MSS-08AU-24

## Feature

- ◇ Sliding contact type.
- ◇ For micro-current.
- ◇ Light operating force.

## Applications

- ◇ CD, DVD player
- ◇ Car audio, Video-camera, FAX
- ◇ Game machine

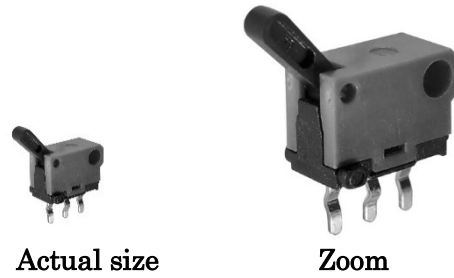

## Products Line

No	Products No	Poles	Positions	Switching timing
1	MSS-08AU-24	1	2	Shorting

◇ As Non-shorting type can be modified to Shorting type, please feel free to contact us for this version.

## Typical Specifications

Items	Specifications
<b>Ratings</b>	20mA 5V DC (Resistive load)
<b>Contact resistance</b>	200 milliohm max
<b>Insulation resistance</b>	10 megohm min. 250V DC
<b>Withstanding voltage</b>	250V AC for 1min
<b>Operating force</b>	1N max
<b>Operating life</b>	20,000 cycles

Dimensions

Unit : mm

No	Style	P.C.B reference Land Dimensions (TOP VIEW) Circuit Diagram										
1	<p>MSS-08AU-24</p>	 <p>Switching timing: Shorting Timing chart</p> <table border="1"> <tr> <td>1-C</td> <td style="background-color: #cccccc;">A</td> <td style="background-color: #cccccc;">B</td> <td style="background-color: #cccccc;">C</td> <td>D</td> </tr> <tr> <td>C-2</td> <td>A</td> <td style="background-color: #cccccc;">B</td> <td style="background-color: #cccccc;">C</td> <td>D</td> </tr> </table> <p>▨=ON</p>	1-C	A	B	C	D	C-2	A	B	C	D
1-C	A	B	C	D								
C-2	A	B	C	D								

Notes

1. The appearance and specifications of the product may be modified without prior notice to improve its performance.
2. This catalog shows only outline specifications. When using the product, please obtain formal specifications supply.
3. Please see appendix [Cautions in Using Switches].
4. For high safety applications, please confirm with protection and redundant circuit.
5. This detector switch is not a washable type.
6. In manual soldering, consideration should be given to apply the soldering iron to the tip of the terminal so that unusual pressure is not applied to the terminal.
7. Please do not apply pressure for 1 minute after soldering.
8. Since soldering quality may deteriorate due to sulfuration and oxidation of terminals, please use as soon as possible within maximum 6 months after delivery and use within a after opening the package condition and the one within 1 week after you unpack it again.
9. Please confirm the performance on actual operation by simulation with actual environment environments for high reliability.